





# Assembly Instruction

## Neutrik NBNC75BTU11-D BNC Plug IMAGE 1000

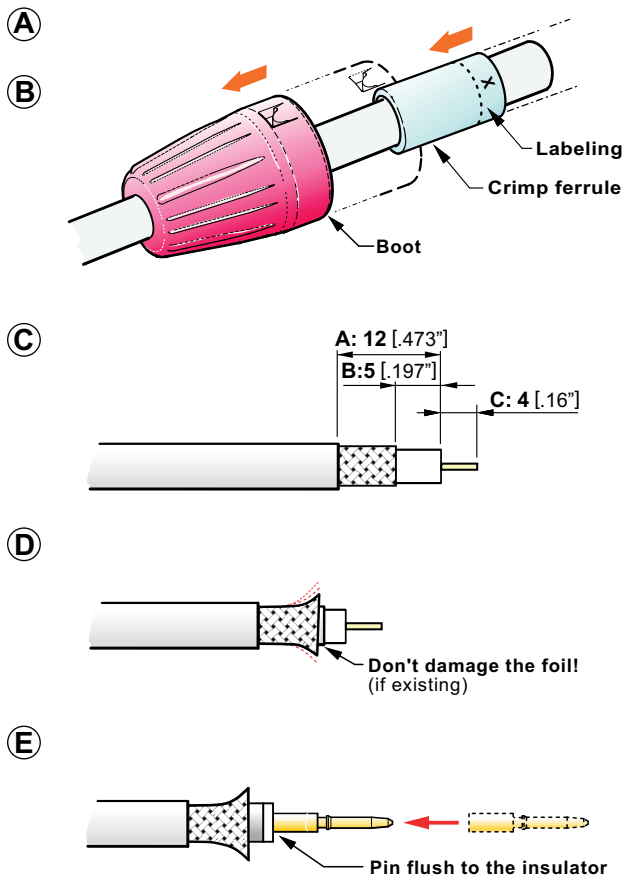


- A** Slide the boot onto the cable  
- Position the labeling to the cabelend
- B** Slide the crimp ferrule onto the cable
- C** Prepare cable as shown  
- Use an adjustable coaxial cable stripper
- D** Spread the braided shield

(It's easily with the NEUTRIK®  
"SHIELD-SPREADING-TOOL"!)



- E** Crimp the pin  
- position the pin on the center conductor  
- Crimp the pin with the tool  
(For best crimping-results it is recommended to use the original Neutrik crimp tool  
- HXBNC with the corresponding insert  
or hexcrimp acc. to IEC 803-W (SW 1.7)  
or squarecrimp acc. to IEC 803-2 (SW 1.6)  
- Pin can also be soldered (Optional)!  
- Straighten the pin if misaligned.
- F** Insert the cable into the connector body
- G** Slide the crimp ferrule over the shield to the front and push the cable to it's end position until you hear a snap noise.

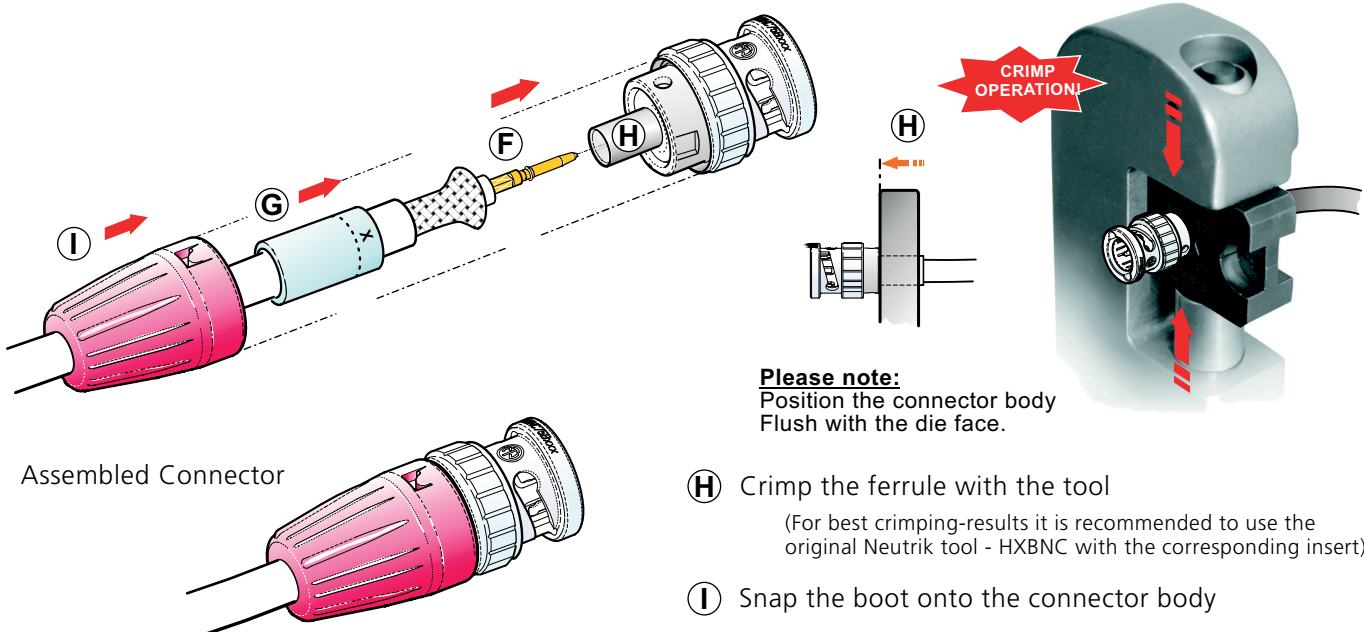

- H** Crimp the ferrule with the tool  
(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)
- I** Snap the boot onto the connector body