



# Informational Document

## Argosy Rack Door Assembly Guide

### Contents

#### Your Pack Should Contain

- A: 1 x Door Latch Plate
- B: 2 x Door Stops
- C: 2 x Self Tapping Screws
- D: 2 x Bolts
- E: 2 x Cage Nuts
- F: 2 x Mounting Guides
- G: 2 x Keys
- H: 1 x Horseshoe Clip
- I: 1 x Barrel Lock



### Fitting the Guides



Locate the mounting holes on the side you wish to hang the door and insert the mounting guides [F], there will be one at the top and one at the bottom.

To maximise stability in the rack the hole is only just big enough so a fair amount of force will need to be applied.



All information correct at the time of writing. Specifications subject to change without notice.



# Informational Document

## Argosy Rack Door Assembly Guide

### Hanging the Door



The spring-loaded bolts pre-attached to the doors then need to be slotted into the mounting guides [F] rotating the door if necessary.



### Inserting the Cage Nuts



Inserting the Cage Nuts for the Door Stops  
Locate the holes at the top and bottom of the rack on the opposite side as the door and snap the cage nuts [E] into place. In our tests we found it significantly easier to feed the cage nuts [E] through from the front and then snap it into place using a long flat screwdriver from the back.



### Bolt the Stops onto the Nut



Now bolt [D] the stopper [B] into position. This can be slid backward and forward before being tightened so that the door aligns with the front of the rack.



All information correct at the time of writing. Specifications subject to change without notice.




# Informational Document

## Argosy Rack Door Assembly Guide

### Attaching the Door Plate



Locating the two holes in the middle of the frame on the opposite side as the door, attach the plate [A] using the two self tapping screws [C]

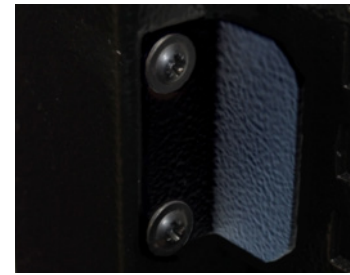


### Fit the Lock



Put the barrel lock [I] through the door and slot the horseshoe clip [H] into place as shown.

If the closed door doesn't sit level, the stoppers [B] will need to be re-adjusted. Refer to the section titled Bolt the Stops onto the Nut.

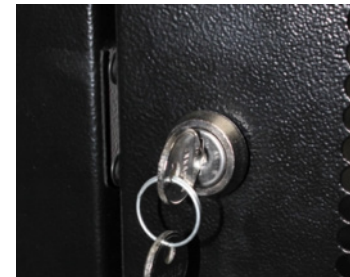

All information correct at the time of writing. Specifications subject to change without notice.