




Product Data Sheet

OCC DX024VSLA9KBM 24 Core OS2 TB Tactical Fibre

Description

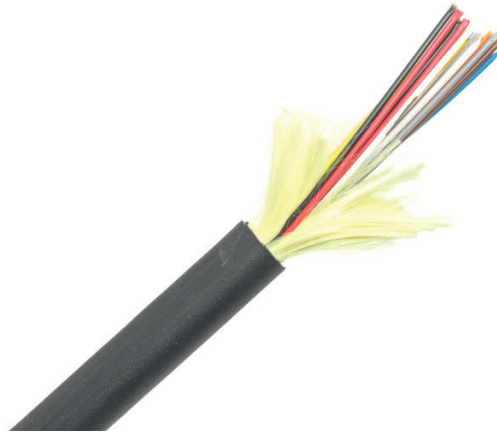

The DX-Series is a deployable cable that is ideal for use in harsh environments where deployment and retrieval for reuse are required.

Product	SKU
OCC DX024VSLA9KBM 24 CORE OS2 TB TACTICAL FIBRE	JF-00-24001

Key Benefits

- Extremely strong, lightweight, rugged, survivable tight-buffered cables are designed for broadcast field use and commercial applications
- Compact, round cable design for ease of transportation and deployment
- Core-locked jacket for improved mechanical performance
- Designed for use in adverse environments where reduced size and weight are important
- Helically stranded cable core for flexibility, survival in difficult pulls, and exceptional mechanical protection for the optical fibers
- Cables have been tested and are in use in broadcast data communications applications worldwide
- Can be used outdoors for temporary deployment directly on the ground in all terrains, including severe environments
- Suitable for industrial, mining and petrochemical environments: chemical resistant
- Crush resistant and resilient with a thick layer of aramid strength members
- Polyurethane jacketed for abrasion, cut and chemical resistance
- Most commonly used with ruggedised multiway military tactical field connectors, for maximum connector retention (400lbs).
- Flame-Retardant Tactical (V) outer jacket.



Product Data Sheet

OCC DX024VSLA9KBM 24 Core OS2 TB Tactical Fibre

Technical Specification

OCC DX002VSLA9KBM 24 Core Specification

Laser Ultra-Fox™ Fibre Performance	Mechanical and Environmental
Fibre Code: SLA	Impact Resistance EIA/TIA-455-25A: 1500 impacts
Industry Standard Designation: Bend Insensitive, Low Water Peak, Single Mode, ITU-T G.657.A1 and ITU-T G.652.D	Crush Resistance TIA/EIA-455-41A: 1800 N/cm
Core/Cladding Diameter (µm): 9/125	Flex Resistance TIA-455-104: 2000 cycles
Wavelength (nm): 1310/1550	Operating Temperature: -40°C to +85°C
Maximum Cabled Attenuation (dB/km): 0.5/0.5	Storage Temperature: -70°C to +85°C
Primary Coating Diameter (µm): 245	Cable Characteristics
Secondary Buffer Diameter (µm): 900	Jacket Colour: Black
Zero Dispersion Slope (ps/nm²-km): 0.092	Jacket Material: Flame Retardant Tactical Polyurethane
Proof Test Level (kpsi): 100	Buffer Material: Hard Elastomeric
Installation and Operating Characteristics	Cable Weight: 63 kg/km (42 lbs/1000')
Max Tensile Load: Installation - 3,000 N (670 lbs) Operating - 1,000 N (220 lbs)	Cable Diameter: 8.5 mm (0.33 in)
Min Bend Radius: Installation - 8.5 cm (3.3 in) Operating 4.3 cm (1.7 in)	