



Product Data Sheet

Argosy HDVP24 1U 2x24 HD Video Panel

Description



A range of MuSA video patching panels, designed for standard and high definition. Up to 2 x 26 inputs are available on a 1U or 2U panel.

Features include centre contacts with 30 micro inches of gold plating over 50 micro inches of nickel for improved insertion loss and durability. A milled aluminium extruded front panel offers a rigid construction whilst the connectors are mounted in injection moulded blocks, to provide slight movement for easy alignment.

Standard finish: Storm Grey powder coating for an excellent finish and robustness. Dawn Grey or Black also available.

Product	SKU
ARGOSY HDVP24 1U 2X24 HD VIDEO PANEL	BP-00-001

Key Benefits


- Enhanced Performance
- Designed for SD and HD
- Standard MuSA Compatibility
- Up to 2 x 26 Connectors
- Range of Accessories
- Choice of Panel Colours



Product Data Sheet

Argosy HDVP24 1U 2x24 HD Video Panel

Technical Specification

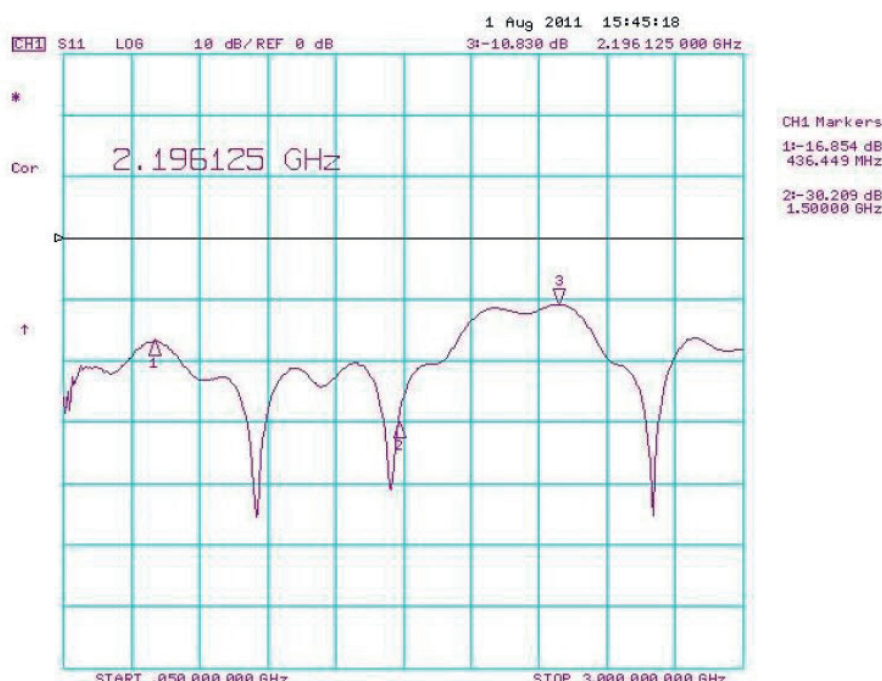

Argosy HDVP24 1U 2x24 HD Video Panel Specification

Contact Resistance:	Inner Conductor $\leq 5\text{m}\Omega$ Outer Conductor $\leq 3\text{m}\Omega$
Insulation Resistance:	$\geq 10\text{G}\Omega$
Voltage Proof:	1KVeFF/50Hz
Impedance (BNC):	75 Ω
Return Loss:	>15dB/1.5GHz+ >10dB/3GHz
Insertion Loss:	$\leq 0.3\text{dB}/3\text{GHz}$
Mating Cycles:	≥ 2500
Force to Engage:	U-link 15 N Straight Plug 10 N
Thermal and Climatic Characteristics: (According to DIN IEC 68-1 40/155/21)	Storage and Operating Temperature -40C up to +65C Moisture resistance according to MIL Spec. 202