



Product Data Sheet

CEENorm 16A 240V Multi-Grip Socket

Description



This industrial connector is a rewirable, waterproof socket with moveable strain relief designed to meet BS EN 60309-2:1992. The Single Phase 2P+E connector enables easy wiring of terminal screws for a secure cable connection.

It is encased in polycarbonate housing, which offers exceptional impact strength and is splash-proof to IP44. The 16A, 230V socket features solid brass contact pins and sleeves with stainless steel circlips to reinforce contact pressure. The lid has stainless steel springs to keep contacts free of dirt.

Rated 220-250V AC, 16 amp, 2 pole plus earth.

Colour- Blue

Product	SKU
CEENORM 16A 240V MULTI-GRIP SOCKET	HB-06-007

Key Benefits


- QUICK-CONNECT plugs have two sealing screws to secure the contact carrier to the housing
- Pressing the contact slide with your finger closes the terminal
- Lock engages automatically, and securely on closing
- Lock can be opened by turning clockwise with a screwdriver
- Reliable and permanent connection by means of spring-clamp technology
- The damage-free conductor clamping guarantees an optimum connection over the entire service life
- Rewiring without additional handling of the conductor



Product Data Sheet

CEENorm 16A 240V Multi-Grip Socket

Technical Specification

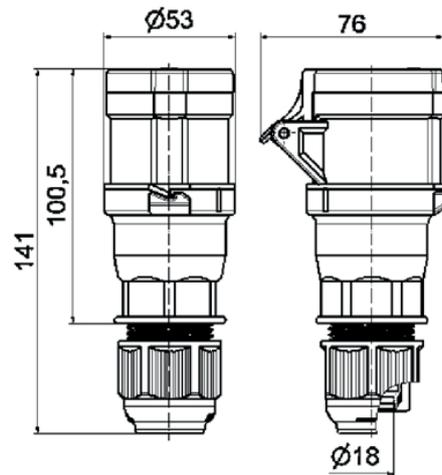

3 MB 110

CEENorm 16A 240V Multi-Grip Socket Specification

Product Category (PG): QUICK-CONNECT Connector	Connection design (AT): screwless spring terminals as cage clamp with Kontex-contact
Current (A): 16A	Maximum conductor size (LQ): 2,5 qmm
Number of Poles (P99): 3p	Cable entry (KE): Cable gland
Number of Poles (P): 2P+PE	Size: Height 149mm x Width 53mm x Depth 69mm
Position of earth contact (H): 6 h	Material of enclosure (GM): Polyamide
Voltage (V): 200 up to 250V	Contact: The contact carrier is made of polyamide, the contacts are brass
Frequency (HZ): 50 and 60Hz	Weight: 0.138 kg
Protection degree (SA): IP44	Additional technical information
Colour: Blue	Multi-Grip cable gland with gasket and integrated strain relief, Screwless housing connection with snap fastening, For cable diameter from 8 up to max. 18mm.
Colour of appliance: Collar blue RAL 5015, Hinged lid blue RAL 5015, Cable gland grey RAL 7035, Housing cover blue RAL 5015	