




Product Data Sheet

Lindy USB 3.2 Type A to Micro-B Cable, 5Gbps, Cromo Line

Description

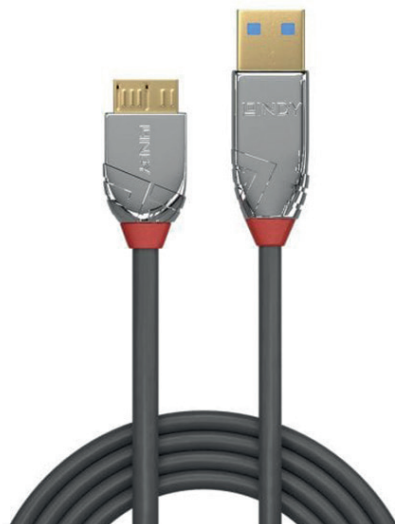

The Cromo Line USB 3.2 Type A to B cables from Lindy's Cable Lines concept are high-performance, fully-featured and design-oriented connectivity solutions, combined with the highest quality construction materials and distinctive connector architecture.

Cromo Line USB 3.2 cables feature triple shielded construction with tinned copper conductors for premium performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

USB bandwidths up to 5Gbps are supported for rapid transfer of large data volumes.

Cromo Line USB 3.2 Type A to Micro-B cables are available in the following lengths: 0.5m, 1m, 2m and 3m.

Information about USB generations

We have adapted the naming of our USB 3 cables to follow the updated USB specification.

USB 3.0 and USB 3.1 Gen 1 have been renamed to USB 3.2 Gen 1, supporting data transfer up to 5Gbps

USB 3.1 and USB 3.1 Gen 2 are now called USB 3.2 Gen 2, supporting data transfer rates up to 10 Gbps

USB 3.2 Gen 2x2 is a new standard, supporting data transfer rates up to 20 Gbps

USB 3.0, USB 3.1 and USB 3.2 PCs, cables and devices are all compatible with each other, when using either a USB Type A or USB Type C host interface.

Product	SKU
LINDY USB 3.2 TYPE A TO MICRO-B CABLE, 5GBPS, CROMO LINE	RB-08-30005



Product Data Sheet

Lindy USB 3.2 Type A to Micro-B Cable, 5Gbps, Cromo Line

Key Benefits

- Superior performance and design USB 3.2 Gen 1 Type A to Micro-B cable for public facing and design focused commercial and home applications
- SuperSpeed USB - supports data transfer speeds up to 5Gbps (USB 3.0, USB 3.1 Gen 1)
- Chrome design ABS housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant, high performance tinned copper conductors
- 10 year warranty

Technical Specification

Lindy USB 3.2 Type A-Micro-B Cable, Cromo Line Specification

Connectors	Jacket Material: PVC
Connector A: USB 3.2 Type A Male	Conductor Material: Tinned Copper
Connector B: USB 3.2 Type Micro-B Male	Conductor Gauge: Power: 24AWG Data: 28AWG
Housing Material: Chrome Plated, ABS	Shielding: Aluminium Braid 85%
Connector Plating: Gold 1µm	Specifications
Pin Construction: Phosphor Bronze	Supported Bandwidth: 5Gbps
Pin Plating: Gold 3µm	Maximum Resolution: -
Dimensions USB A (approx.) WxDxH: 16x35x8.3mm (0.63x1.38x0.34in)	Nominal Attenuation: 0.5MHz-7.5GHz
Dimensions USB Micro-B (approx.) WxDxH: 15.75x31.5x8.4mm (0.62x1.24x0.33in)	Minimum Bend Radius: 55mm (2.2in)
Cable Construction	Operating Temperature: -20°C - 80°C (-4°F - 176°F)
Length: 0.5m, 1m, 2m, 3m	Storage Temperature: -25°C - 85°C (-13°F - 185°F)
Standard: USB 3.2 Gen 1	Miscellaneous
Colour: Grey	Packaging Type: Polybag
Type: Round	Warranty (Years): 10
Jacket Diameter: 5.5mm (0.22in)	Certified: RoHS, REACH, UL