



Product Data Sheet

Neutrik NK04SA-L-0-200 opticalCON QUAD LITE
SM/APC 200M Airspool

Description



The Neutrik opticalCON QUAD LITE is a 4 channel fibre system, improved bending performance due to new tactical fibre design, black matt outer jacket, available in multi- and single-mode (PC or APC).

Besides extreme applications there is also a demand for quality fibre connections for semi-rugged applications as e.g. patching, or permanent installations. Such applications require a focus on costs and a sealing shutter is not required. The opticalCON QUAD LITE offers high performance and a cost effective, compact, and light weight design. It is fully compatible with the standard opticalCON QUAD chassis connector.

The opticalCON QUAD LITE cable connector accommodates a standard optical 1.25 mm ferrule in a durable plastic housing. It features a spring loaded push-pull locking mechanism and an excellent cable retention utilising aramid yarn. The connector comes pre-assembled and is not available as a single component. The cable is available in different lengths and comes with an airspool packaging.

Product	SKU
NEUTRIK NK04SA-L-0-200 OPTICALCON QUAD LITE SM/APC 200M AIRSPOOL	KQ-27-16200

Key Benefits

- Ruggedised 4 channel fibre optic connection system
- Cost optimised fibre connection for semi and permanent installation
- Designed for point-to-point connections
- Waterproof acc. to IP65 safety standard in mated condition
- Lightweight plastic housing
- Reliable Push-Pull locking mechanism
- Easy to clean, no special tools required
- Compatible with standard opticalCON NO4FDW-A chassis
- Custom colour coding possible
- Tactical patch cable



Product Data Sheet

Neutrik NK04SA-L-0-200 opticalCON QUAD LITE
SM/APC 200M Airspool

Technical Specification

Neutrik NK04SA-L-0-200 Specification


Connection Type: opticalCON	Temperature range: -40 °C to +70 °C
Gender: male	Optical
Mechanical	Insertion loss: < 0.45 dB / connection
Cable retention: > 250 N	Optical connector: 1.25 mm ceramic ferrule (PC and APC)
Insertion force: < 45 N	Optical wiring: ISO / IEC 11801
Withdrawal force: < 45 N	Optical return loss: >50 dB (PC) >60 dB (APC)
Lifetime: > 2500 mating cycles	Mobile cable
Locking device: Push-Pull	Colour: black, matte
Material	Core diameter: Singlemode 9 µm, Multimode 50 µm
Boot: Rubber (EPDM)	Cladding diameter: 125 µm PUR
Bushing: Polyamide (PA 6) & Thermoplastic elastomer (TPU)	Minimal bending radius: 3.5 cm
Insert: PBT	Number of fibers: 4
Shell: PBT	Cable retention: Aramid yarn
Strain relief: CuZn36 Pb3 (Brass)	Weight: 14 kg/km
Dust protection cap: Rubber (EPDM)	Overall diameter: 3.5 mm
Environmental	
Flammability: UL 94 HB	



Product Data Sheet

Neutrik NK04SA-L-0-200 opticalCON QUAD LITE
SM/APC 200M Airspool

Tactical Patch Cable

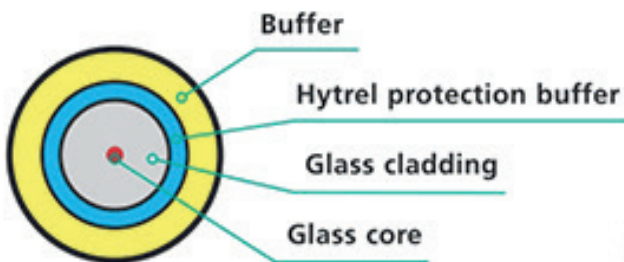

Conventional patch cables are sensitive in terms of undercutting the minimum bending radius and lateral pressure. Neutrik's tactical patch cables contain a unique fiber design including a protection layer which allows bending with minimal radius and increased lateral pressure. Therefore the tactical patch cables are the right choice for permanent or semi-permanent applications.

