




Product Drawing

Enova Female 3 Pole XLR - Black

Technical Drawing

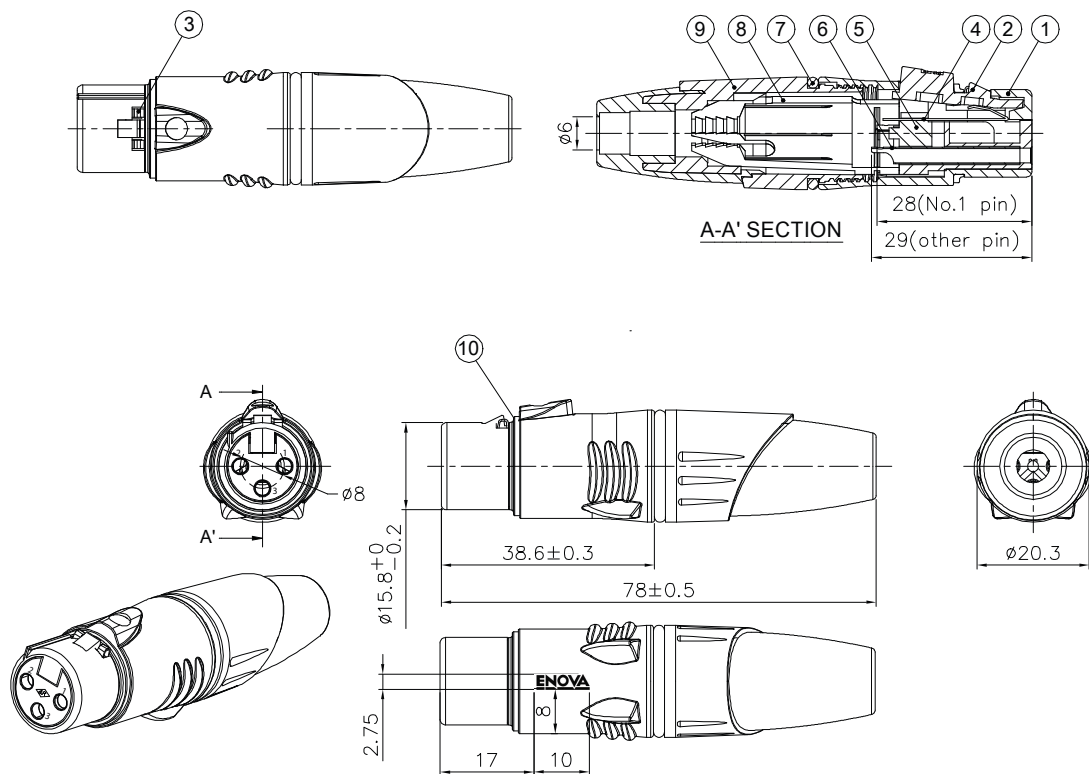

Notes:

1. Remove O-ring used for cable O.D.: 3.3~4.8mm,
Standard connector used for cable O.D.: 5.0~7mm

10	O-RING	SILICON	BLACK	1	
9	CAP+BOOT	PA6+TPR	BK+GY	1	
8	CABLE CLAMP	POM	WHITE	1	
7	O-RING	SILICON	BLACK	1	
6	FEMALE PIN	PHOSPHOR BRONZE	SILVER	3	
5	INSULATOR	PA	BLACK	1	
4	LATCH	STAINLESS STEEL	TIN	1	
3	FIXED SHEET	STAINLESS STEEL	NICKEL	1	
2	PUSH BUTTON	ZZnAL4-1	NICKEL	1	
1	DIE CAST SHELL	ZZnAL4-1	Electro coating black	1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
ANGLES = ±5°
UP TO 6 = ±0.2
6-40 = ±0.4
40-120 = ±0.6
120-315 = ±1
ABOVE 315 = ±1.6

<small>THIRD_ANGLE</small>	<input checked="" type="checkbox"/> <input type="checkbox"/>
<small>SCALE</small>	1/1