



Product Data Sheet

Barnfind BarnPalette OCS, power cable not included

Optical Changeover for bi-directional signal transmissions

Description



Designed to ensure uninterrupted fibre connectivity in mission-critical applications. This system comprises two units connected by dual fibre strands – primary and backup. The OCS continuously monitors the primary fibre, instantly switching to the backup strand if any issues are detected. This ultra high-speed transition guarantees maximum uptime and reliability, making it an indispensable tool for any high-stakes environment.

We recommend using **single mode fibers** when linking the BarnColor and BarnPalette devices.

Product	SKU
BARNFIND BARNPALETTE OCS, POWER CABLE NOT INCLUDED	105978




Product Data Sheet

Barnfind BarnPalette OCS, power cable not included

Optical Changeover for bi-directional signal transmissions

Technical Specification

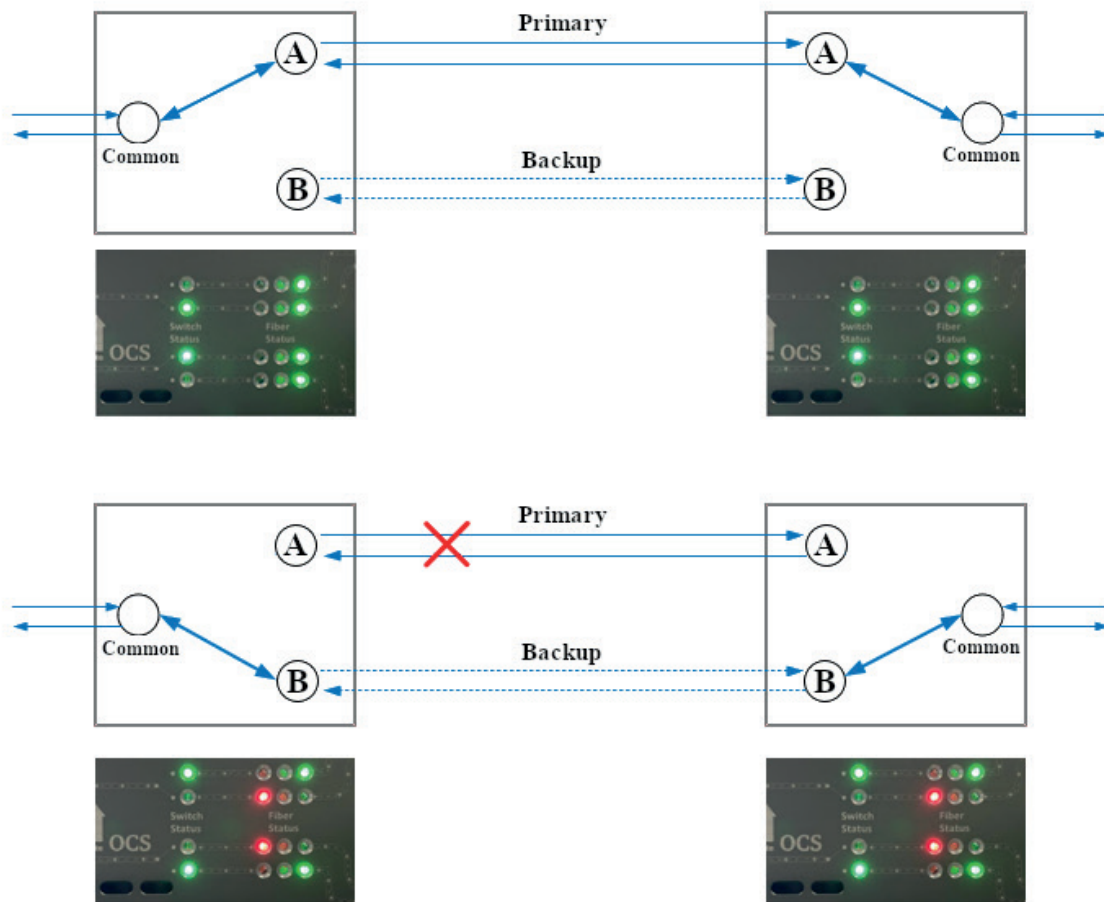

Barnfind BarnPalette OCS Specification

Fiber port (Cascade and Peer):	100-240VAC, 15 Watt
Neutrik opticalCON DUO, also compatible with duplex Single Mode fiber LC-LC	Physical size:
Power plug:	223mm x 277mm x 44mm (8.8" x 10.9" x 1.7")
Neutrik powerCON or TRUE1	1.4 kg