


# Argosy Informational Document

SERVING THE BROADCAST INDUSTRY

Version: V213

## ARGOSY RACK DOOR INSTALLATION GUIDE

### 0. Your Pack Should Contain

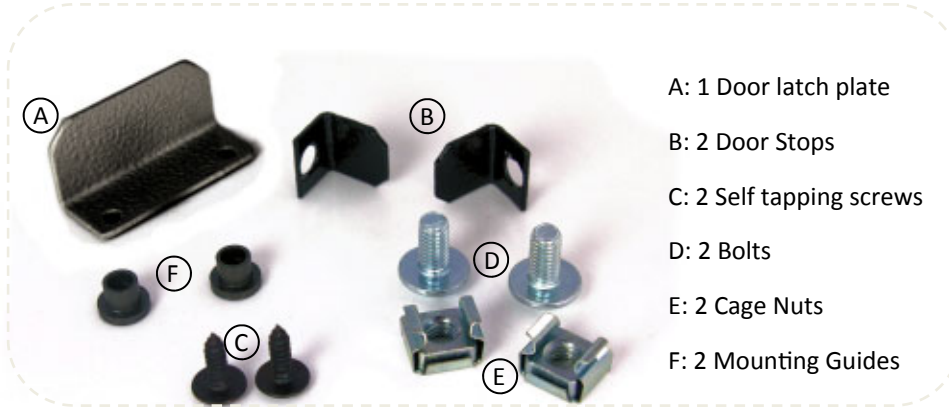

- A: 1 Door latch plate
- B: 2 Door Stops
- C: 2 Self tapping screws
- D: 2 Bolts
- E: 2 Cage Nuts
- F: 2 Mounting Guides

### 1. Fitting the guides




Locate the mounting holes on the side you wish to hang the door and insert the mounting guides [F], there will be one at the top and one at the bottom. To maximise stability in the rack the hole is only just big enough so a fair amount of force will need to be applied.



### 2. Hanging the Door



The spring loaded bolts pre-attached to the doors then need to be slotted into the mounting guides [F] rotating the door if necessary.

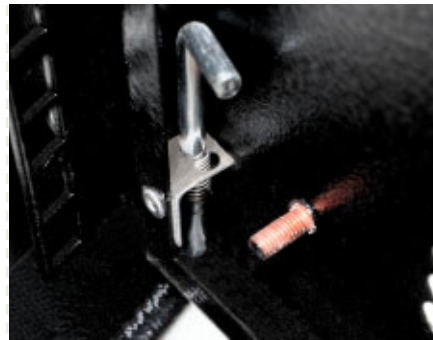

- Cable
- Fibre Optics
- Connectors
- Racks & Accessories
- Cable Management
- Routers
- Patch Panels
- Mains Distribution
- Audio & Video Monitors

# Argosy Informational Document

SERVING THE BROADCAST INDUSTRY

### 3. Inserting the Cage Nuts For the Door Stops



Locate the holes at the top and bottom of the rack on the opposite side as the door and snap the cage nuts [E] into place.

In our tests we found it significantly easier to feed the cage nuts [E] through from the front and then snap it into place using a long flat screwdriver from the back.



### 4. Bolt the Stops onto the Nut



Now bolt [D] the stopper [B] into position. This can be slid backward and forward before being tightened so that the door aligns with the front of the rack.



### 5. Attaching the Door latch plate



Locating the two holes in the middle of the frame on the opposite side as the door, attach the plate [A] using the two self tapping screws [C]



If the closed door doesn't sit level the stoppers [B] from step 4 will need to be readjusted.

*All information correct at time of writing. Specifications subject to change without notice. All trademarks referenced remain the property of their respective owners.*

Argosy Components Ltd (incorporating Argosy-Cable Warehouse)  
Units 6&7, Ridgeway, Drakes Drive,  
Long Crendon, Buckinghamshire,  
HP18 9BF, United Kingdom

Sales:  
☎ +44 1844 202101  
☎ +44 1844 202025  
✉ sales@argosycable.com

Information:  
www.argosycable.com

