




Product Data Sheet

Argosy 15 Way D-Sub Metalised Plastic Hood

Description

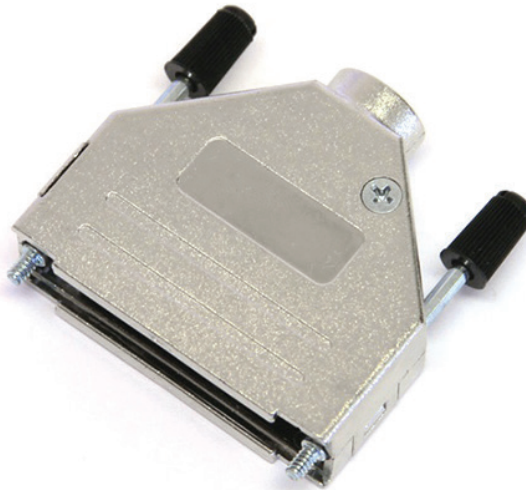

The Argosy 15 Way D-Sub Metalised Plastic Hood comes complete with plastic capped jackscrews and a selection of grommet sets for various cable sizes.

This is available in all sizes to suit 9, 15, 25 and 37-way standard connectors and 15, 26, 44 and 62-way high-density connectors.

Product	SKU
ARGOSY 15 WAY D-SUB METALISED PLASTIC HOOD	104948

Key Benefits

- Manufactured in ABS Plastic, Ni Plated
- Supplied with UNC4-40 Jackscrews as standard, M2.5, M2.6 or M3.0 threads available on request
- Cable Outlet: Straight
- Cable Diameter up to 13.0mm
- Available in sizes 9-15-25-37
- Minimise interference from electromagnetic and RF sources
- Non-static parts avoid ESD problems
- Accept round foil and braided cable types
- Approved according to VDE 0871, FCC 20780 and 89/336/EU
- Long jackscrews with UNC 4-40 thread as standard M2.5, M2.6 or M3.0 as option



Product Data Sheet

Argosy 15 Way D-Sub Metalised Plastic Hood

Technical Specification

Argosy 15 Way D-Sub Metalised Plastic Hood Specification

Material: ABS Plastic, Ni-plated	Locking screws: Long jackscrews with moulded top for colour coding
Operating Temperature: -40°C to +110°C	Cable outlet: Straight
Cable strain relief: Polycarbonate, PC UL94 V-0	Attenuation factor: >40 dB between 30 MHz and 1 GHz
Cable diameter: 3.0 - 13.0 mm	

Size	Dim A	Dim B
9-way	31.0	31.0
15-way	39.3	39.3
25-way	53.0	53.0
37-way	69.5	69.5

