



# Product Data Sheet

Neutrik NK02M-L-0-20 opticalCON DUO LITE  
MM 20M Airspool

## Description



The Neutrik opticalCON DUO LITE is a 2 channel fibre system, improved bending performance due to new fibre design, black matt outer jacket, available in multi- and single-mode (PC or APC). Designed for temporary and permanent installations.

Besides extreme applications there is also a demand for quality fibre connections for applications as e.g. patching, the interconnection of devices, or permanent installations. Such applications require a focus on costs and a sealing shutter is not required. The opticalCON DUO LITE offers high performance and a cost effective, compact, and light weight design. It is fully compatible with the standard opticalCON DUO chassis connector.

The opticalCON DUO LITE cable connector accommodates a standard optical 1.25mm ferrule in a durable plastic housing. It features a spring loaded push-pull locking mechanism and an excellent cable retention utilising aramid yarn. The connector comes pre-assembled and is not available as a single component. The cable is available in different lengths.

| Product   | SKU         |
|---|-------------|
| NEUTRIK NK02M-L-0-20 OPTICALCON DUO LITE<br>MM 20M AIRSPOOL | KQ-26-01020 |

## Key Benefits

- Ruggedised 2 channel fibre optic connection system
- Cost optimised fibre connection for semi and permanent installation
- Waterproof acc. to IP65 safety standard in mated condition
- Lightweight plastic housing
- Reliable Push-Pull locking mechanism
- Easy to clean, no special tools required
- Compatible with standard opticalCON DUO chassis NO2-4FDW-A\*Tactical patch cable



# Product Data Sheet

Neutrik NK02M-L-0-20 opticalCON DUO LITE  
MM 20M Airspool

## Technical Specification

### Neutrik NK02M-L-0-20 Specification


|  |   |
|--|---|
| <b>Connection Type:</b> opticalCON                               | <b>Temperature range:</b> -40 °C to +70 °C              |
| <b>Gender:</b> Female  | <b>Optical</b>  |
| <b>Mechanical</b>  | <b>Insertion loss:</b> < 0.45 dB / connection           |
| <b>Cable retention:</b> > 250 N                                  | <b>Optical connector:</b> LC-Duplex (PC and APC)        |
| <b>Insertion force:</b> < 45 N                                   | <b>Optical wiring:</b> ISO / IEC 11801                  |
| <b>Withdrawal force:</b> < 45 N                                  | <b>Optical return loss:</b> >50 dB (PC)<br>>60 dB (APC) |
| <b>Lifetime:</b> > 2500 mating cycles                            | <b>Mobile cable</b>                                     |
| <b>Locking device:</b> Push-Pull                                 | <b>Colour:</b> black, matte                             |
| <b>Material</b>  | <b>Core diameter:</b> Singlemode 9 µm, Multimode 50 µm  |
| <b>Boot:</b> Rubber (EPDM)                                       | <b>Cladding diameter:</b> 125 µm                        |
| <b>Bushing:</b> Polyamide (PA 6) & Thermoplastic elastomer (TPU) | <b>Comment:</b> PUR                                     |
| <b>Insert:</b> PBT   | <b>Minimal bending radius:</b> 3 cm                     |
| <b>Shell:</b> PBT  | <b>Number of fibers:</b> 2                              |
| <b>Strain relief:</b> CuZn36 Pb3 (Brass)                         | <b>Cable retention:</b> Aramid yarn                     |
| <b>Dust protection cap:</b> Rubber (EPDM)                        | <b>Weight:</b> 9 kg/km                                  |
| <b>Environmental</b>   | <b>Overall diameter:</b> 3 mm                           |
| <b>Flammability:</b> UL 94 HB                                    |   |



# Product Data Sheet

Neutrik NK02M-L-0-20 opticalCON DUO LITE  
MM 20M Airspool

## Tactical Patch Cable

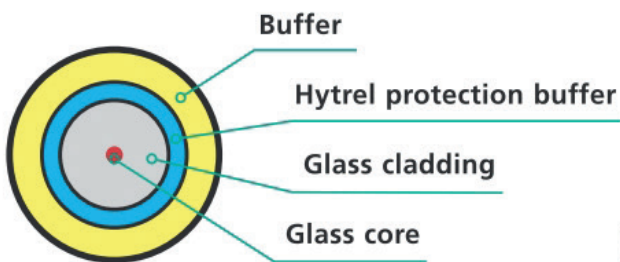

Conventional patch cables are sensitive in terms of undercutting the minimum bending radius and lateral pressure. Neutrik's tactical patch cables feature unique fibre design including a protection buffer which allows bendings with minimal radius and increased lateral pressure. Therefore the tactical patch cables are the right choice for permanent or semi-permanent applications.

